

ICON Wall Sconce

120v : **3-511-xx**

277v : **37-511-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-22 Oiled Bronze



-14 Polished Chrome




-24 Satin Nickel



-25 Satin Copper




-40 Aged Brass

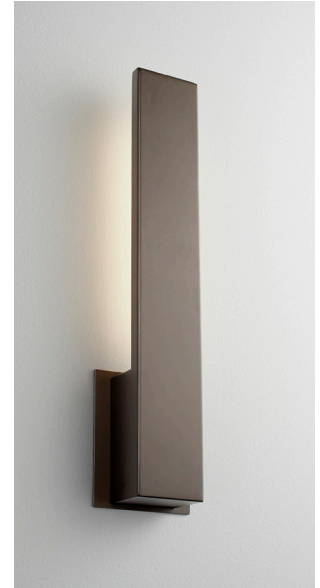

With backplate

LIGHT SOURCE	1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	12.8W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 689 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	350 mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Oiled Bronze (-22), Satin Nickel (-24), Satin Copper (-25), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box*, 2"x 3" J-Box *With optional backplate
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

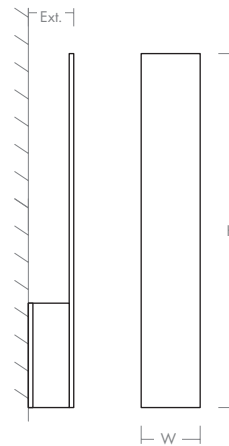

DIMENSIONS

W: 3.25"
H: 19.5"
Ext: 2.38"

With optional backplate

W: 4.75"
H: 20.00"
Ext: 2.50"
M.C: 17.00" From top of fixture

Order example for standard fixture:
3-511-24 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120v, 37: 277v

Order example for optional color temperatures: **3-511-2724**
27: 2700K, 35: 3500K, 40: 4000K

