

OLIO Wall Sconce

120v : **3-538-xx**

277v : **37-538-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-24 Satin Nickel



-22 Oiled Bronze

LIGHT SOURCE	1 x 8.2W LED, 3000K, CRI 90
LUMINAIRE POWER	10.1W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 302 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	350 mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Glass
DIFFUSER	- White Opal Glass
FINISHES	Satin Nickel (-24), Oiled Bronze (-22)
MOUNTING	4" Octagonal J-Box*, 4"x4" J-Box* *Deep J-box
STANDARDS	ETL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

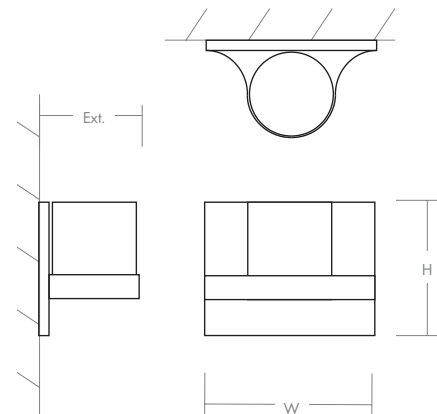

DIMENSIONS

W: 7.00"

H: 5.50"

Ext: 4.00"

M.C: 2.75" From top of fixture

Order example for standard fixture:

3-538-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-538-2724**

27: 2700K, 35: 3500K, 40: 4000K

