

TOTEM Pendant

3-614-xxxx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-1624 Gray/Satin Nickel Lit



-1540 Dark Gray/Aged Brass

| | |
|------------------------------------|--|
| LIGHT SOURCE | LED Array with Driver on Board |
| LUMINAIRE POWER | 6.2W at 120V |
| RATED LIFE | 50000 hr RL |
| OPTIONAL COLOR TEMPERATURES | 3000K Only |
| LUMEN OUTPUT | Delivered: TBD lm (LM-79) |
| INPUT VOLTAGE | 120V AC, 50/60Hz |
| DRIVER OUTPUT | Driver is integrated into LED Array |
| DIMMING | TRIAC and ELV Dimming |
| CONSTRUCTION | Concrete and Steel |
| DIFFUSER | - Clear Acrylic |
| FINISHES | Dark Gray/Aged Brass (-1540), Gray/Satin Nickel (-1624) |
| MOUNTING | 4" Octagonal J-Box *Junction box must be securely mounted to building structure and capable of supporting at least 15 pounds. |
| STANDARDS | cETL Damp Listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0. |

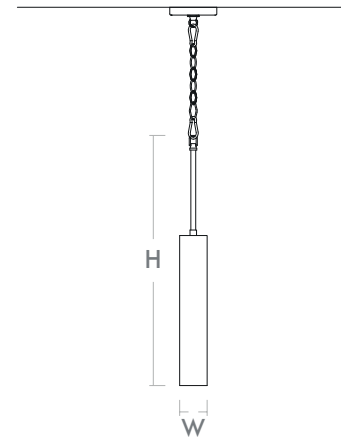

DIMENSIONS

W. Fixture: 2.75"
H. Fixture: 26.125"
 * Measured using 1-8" stem for minimum hanging height
Weight: 7.8 lbs.
 Supplied with 2-8", 2-12", and 2-16" stems plus 1' of chain

Order example for standard fixture:
3-614-1540 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V Only

