

BEACON Wall Sconce

120v : **3-587-xx**

277v : **37-587-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____


PROJECT _____ DATE _____



-95 Old World




-24 Satin Nickel



-1 White Cotton




-2 Matte White Acrylic



-5 White Grass

LIGHT SOURCE	1 x 11.9W LED, 3000K, CRI 90
LUMINAIRE POWER	10.4W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: (-1) Fabric: 1m (LM-79) (-2) Acrylic: 441 lm (LM-79) (-5) Fabric: 1m (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic /or Fabric
DIFFUSER / METAL FINISHES	(-124) White Cotton / Satin Nickel (-195) White Cotton / Old World (-224) Matte White Acrylic / Satin Nickel (-295) Matte White Acrylic / Old World (-524) White Grass / Satin Nickel (-595) White Grass / Old World
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

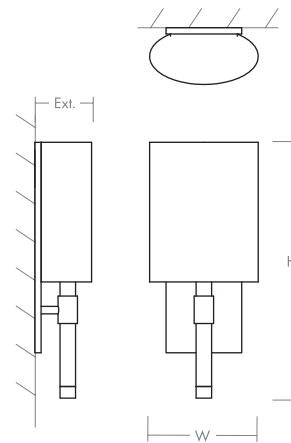

DIMENSIONS

W:	7.00"
H:	16.50"
Ext:	3.66"
M.C:	4.50" From top of fixture

Order example for standard fixture:

3-587-524 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-587-27524**

27: 2700K, 35: 3500K, 40: 4000K

