

**NERO Chandelier**  
**3-684-1540**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_


PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-1540 Black/Aged Brass

<b>LIGHT SOURCE</b>	(24x) 2.1W LED Arrays, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	60.8W at 120V
<b>RATED LIFE</b>	30000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 1292 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	720mA, 30.24W max power per driver (2 drivers total - 60.48W total max output)
<b>DIMMING</b>	TRIAC Dimming
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing and Canopy
<b>DIFFUSER</b>	- Frosted Acrylic
<b>FINISHES</b>	Black/Aged Brass (-1540)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

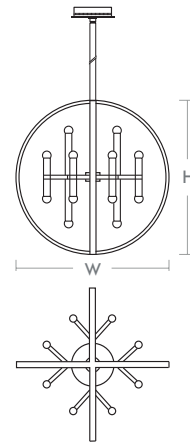

**DIMENSIONS**

**W. Fixture: 24.00"**  
**H. Fixture: 26.50"**  
**Supplied with 2-8", 2-12", and 3-16"**  
**stems to customize hanging height**

Note: Canopy swivel allows up to a 20° slope

Order example for standard fixture:  
**3-684-1540** (x- Voltage - xxx-Sequence # - xx-Finish)  
**3: 120V Only**

