

CALYPSO Outdoor

120v : **3-731-xx**

277v : **37-731-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-16 Gray



-22 Oiled Bronze

LIGHT SOURCE	2 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	25.9W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1015 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2 x 350 mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Cast Aluminium and Polycarbonate
DIFFUSER	- Polished White Polycarbonate
FINISHES	Gray (-16), Oiled Bronze (-22)
MOUNTING	4" Octagonal J-Box, 2"x3" J-Box* * Must be mounted horizontally (Installer must provide a bead of caulk between fixture housing and mounting surface)
STANDARDS	ETL Wet, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

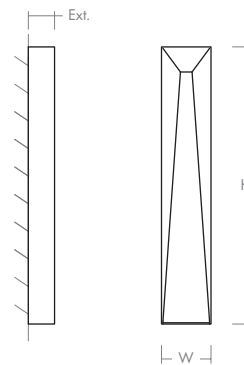

DIMENSIONS

W: 4.25"

H: 22.00"

Ext: 2.25"

M.C: 11.00" From top of fixture

Order example for standard fixture:

3-731-22 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-731-2722**

27: 2700K, 35: 3500K, 40: 4000K

