

# PROFILE Wall Sconce

120v : **3-517-xx**

277v : **37-517-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-14 Polished Chrome



-24 Satin Nickel

<b>LIGHT SOURCE</b>	2 x 11.9W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	29.8W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 360 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	2 x 350mA, 12W
<b>DIMMING</b>	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Polished Chrome (-14), Satin Nickel (-24)
<b>MOUNTING</b>	4" Octagonal J-Box with optional backplate, 2" x 3" J-Box
<b>STANDARDS</b>	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

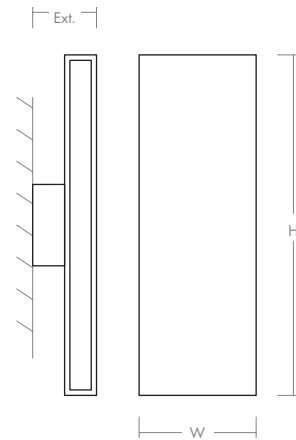

### DIMENSIONS

**W:** 4.50"

**H:** 16.00"

**Ext:** 3.00"

**M.C:** 8.00" From top of fixture

Order example for standard fixture:

**3-517-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120v, **37:** 277v

Order example for optional color temperatures: **3-517-2724**

**27:** 2700K, **35:** 3500K, **40:** 4000K

