

# HALO Wall Sconce

120v : **3-515-xx**

277v : **37-515-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-25 Satin Copper



-14 Polished Chrome



-24 Satin Nickel



-40 Aged Brass

<b>LIGHT SOURCE</b>	1 x 10.1W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	13.0W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 642 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	350 mA, 12W
<b>DIMMING</b>	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Polished Chrome (-14), Satin Nickel (-24), Satin Copper (-25), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box, 2"x3" J-Box* *Must be mounted horizontally
<b>STANDARDS</b>	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

**NOTE** Backplate is required


Order example for standard fixture:

**3-515-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120v, **37:** 277v

Order example for optional color temperatures: **3-515-2724**

**27:** 2700K, **35:** 3500K, **40:** 4000K

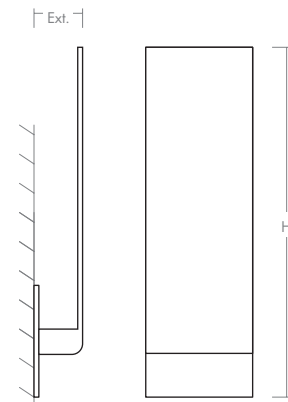

## DIMENSIONS

**W:** 5.50"

**H:** 18.00"

**Ext:** 3.25"

**M.C:** 15.19" From top of fixture

