

MAIA Outdoor

120v : **3-742-xx**

277v : **37-742-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-16 Gray



-22 Oiled Bronze

LIGHT SOURCE	2 x 11.9W LED, 3000K, CRI 90
LUMINAIRE POWER	30.3W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 963 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2 x 350 mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Gray (-16), Oiled Bronze (-22)
MOUNTING	4" Octagonal J-Box*, 2"x 3" J-Box *With optional backplate (Installer must provide a bead of caulk between fixture housing and mounting surface)
STANDARDS	ETL Wet, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

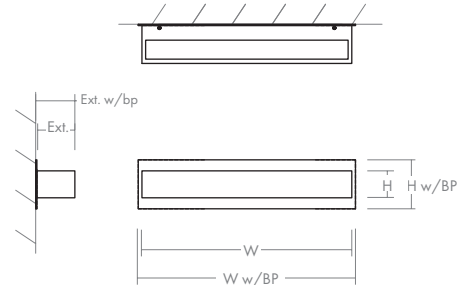

DIMENSIONS

W: 23.25"
H: 2.75"
Ext: 3.88"
M.C: 1.38" From top of fixture

With optional backplate

W: 24.00"
H: 5.00"
Ext: 4.00"
M.C: 2.50" From top of fixture

Order example for standard fixture:

3-742-22 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, **37:** 277v

Order example for optional color temperatures: **3-742-2722**

27: 2700K, **35:** 3500K, **40:** 4000K

